

ENGINEERED WOOD FLOORING




① **Veneer** (Option : 0.6mm , 1.2mm, 2mm, 3mm)

② **Multi-layer Plywood**

Provides a core usually manufactured from mixed hardwood with each layer(approx 2mm) running in an alternate direction to provide enhanced radial and longitudinal stability .The wear layer of solid oak is then bonded to the top of the multi-layer core.

③ **Tongue and Groove &Click system**

④ **Supporting Layer**

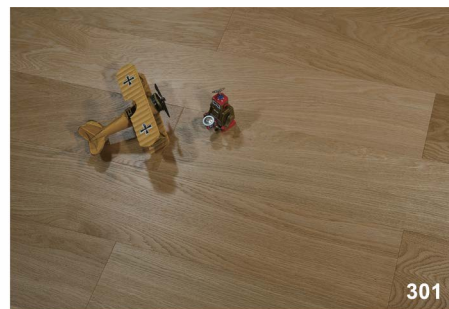


ENGINEERED WOOD FLOORING is always with selected high-quality wood material for different customer 's demands.


HERRINGBONE ENGINEERED WOOD FLOORING




PRODUCTION PROFILE

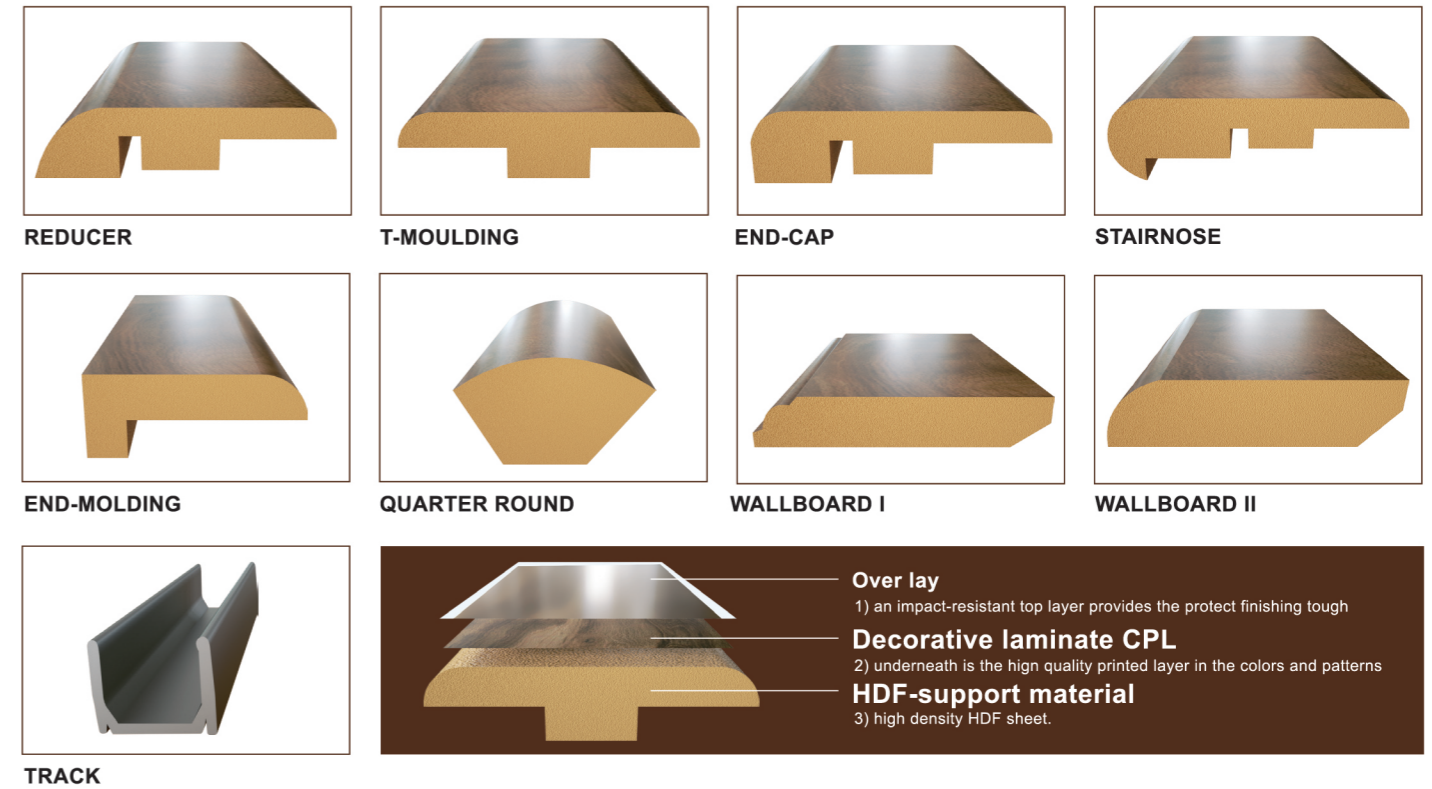

UNDERLAYMENT

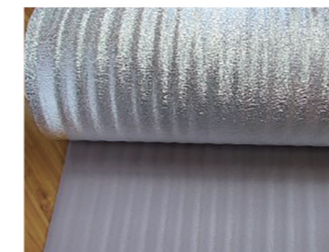


- **BASIC(EPE)**
EPE foam, economical choice
Basic soundproof and wood flooring

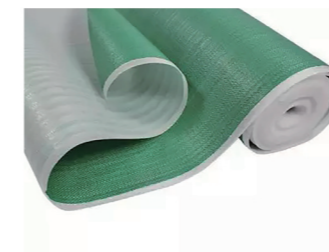

- **ACOUSTIC (EVA& IXPE)**
EVA & IXPE underlay for wood flooring
Obvious advantage in sound insulation and moisture Barrier

- **QUIET (RUBBER & FELT & PU FOAM)**
Rubber & Felt underlay for wood flooring
PU foam for wood flooring or carpet
Recycled and durable materials
Premium sound absorption and memory rebound cushion

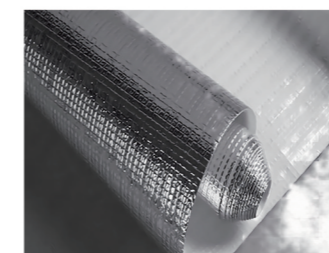

- **WPC&LVT UNDERLAY**
The professional underlay for WPC&LVT flooring
High density makes it excellent in self-leveling
Work better in vapor barrier and sound reduction

- **OTHERS**
Frankly we are currently developing some NEW UNDERLAY for wood flooring, WPC & LVT flooring.
Please let us know if any good idea, we are willing to work out your new underlay together.